

Teknatool International Limited

7D Dallan Place, Rosedale, Auckland, New Zealand

Tel: +64 09 477 5600 Fax: +64 477 5601

Email: service@teknatool.comWebsite: www.teknatool.com

Frequently Asked Questions

How to Replace the keypad on the DVR XP upgrade panel

Date Raised: 24 April 2017

Safe practices should always be employed to ensure the Health and Safety of yourself, employees and customers (if applicable) Refer to product manuals, exploded drawings and our website if further assistance is required, or contact us on service@teknatool.com

Date Amended

To replace the keypad membrane on the DVR XP upgrade panel (SKU 55523)

Tools Required:


1 x Philips Screwdriver

1 x Flat Head Screwdriver (Or anything similar)

Procedure:

Step No.	Description	Image
1.	<p>Remove the keypad membrane from the control panel.</p> <p>The membrane is secured in place by use of adhesives therefore it can be pried off by using a flat head screw driver or anything equivalent.</p> <p>Note: The keypad membrane is approximately 2mm thick. Make sure to insert the flat head screwdriver under the membrane and not the decal.</p>	
2.	<p>After the keypad membrane has been removed, unscrew the 2 Philips screws which holds the blue circuit board.</p> <p>Remove the 3 wires attached to the blue circuit board after removing the screws. The cables can be pulled out by hand.</p> <p>Note: The 14-pin connector may be difficult to pull out. Be very careful not to injure yourself or any of the components when removing this connector.</p>	

3. Pull the 14-pin connector through the slot on the upgrade panel which has been concealed by the keypad membrane.

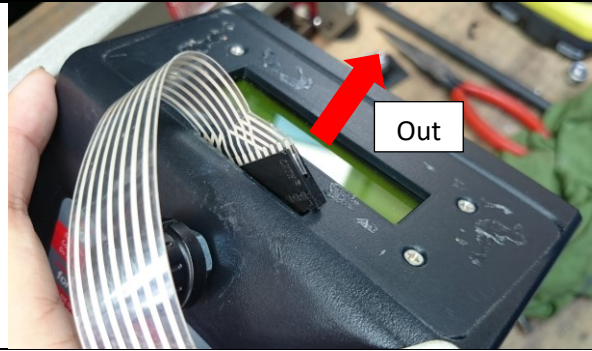

When installing the new membrane:

Step No.	Description	Image
1.	Weave the 14-pin connector back through the panel. Stick the membrane into position	
2.	Connect the 14-pin connector onto the blue circuit board. Note: Make sure that the connector is not connected in reverse	
3.	Mount the blue circuit board on the panel using the 2 Philips screws. Connect the remaining cables to complete the procedure.	